

Modular Signal Towers / KombiSIGN 72
Element IO-Link KS71/72 24VDC BK



Part No.:	646.840.55
Series:	KombiSIGN 71



MECHANICAL DATA	
Height	66 mm
Diameter	70 mm
Materials	PC
Dome colour	Black
Protection category	IP65
Connection	IO-LINK
Working temperature minimum	-30°C
Working temperature maximum	+60°C
Weight with packaging	58 g
Product weight	58 g

ELECTRICAL DATA	
Operating voltage	24V
Operating voltage type	DC
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	6 mA
Protection class	Protection class 2
Pollution degree	3
connectivity	IO-Link


APPROVAL DATA	
Conforms with CE	Yes
WEEE	Yes
Conforms with RED directive	No
Conform with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	cULus
UL Type Rating	Type 12
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with AS-I	No
ICAO Certification	No
Conforms with GL	No
Conforms with RoHS CN	No
Conforms with VdS	No

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Modular Signal Towers / KombiSIGN 72

Element IO-Link KS71/72 24VDC BK

DRAWING

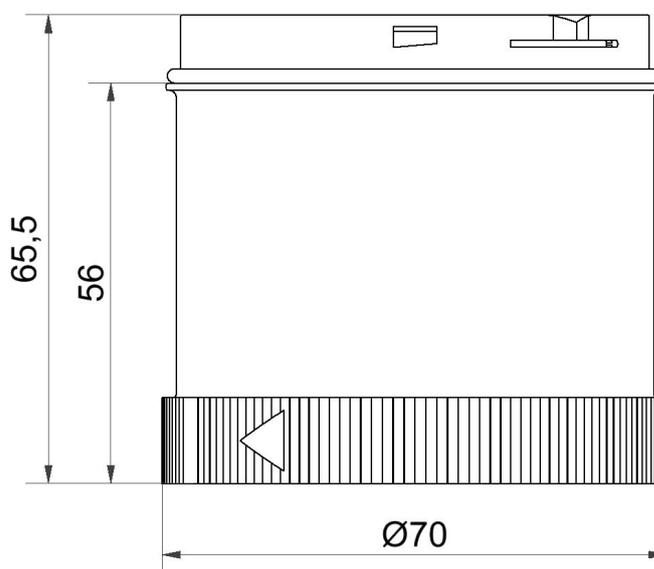

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.