

Completely pre-assembled Signal Towers / ClearSIGN
ClearSIGN BM 24VDC BU/GN/YE/RD



| | |
|-----------|------------|
| Part No.: | 656.000.03 |
| Series: | ClearSIGN |



| MECHANICAL DATA | |
|------------------------------|-----------------------------|
| Height | 320 mm |
| Diameter | 85 mm |
| Materials | PC PC/ABS |
| Dome colour | Clear |
| Housing colour | White |
| Protection category | IP66 |
| Connection | Push-in terminal |
| cross-sectional area minimum | 0,14mm ² / 26AWG |
| cross-sectional area maximum | 0,50mm ² / 20AWG |
| Cable entry | Membrane grommet |
| Cable entry minimum | d = 1 mm |
| Cable entry maximum | d = 9 mm |
| Tension relief | Present (conforms to VDE) |
| Type of fixing | Base mounting |
| Working temperature minimum | -20°C |
| Working temperature maximum | +50°C |
| Weight with packaging | 490 g |
| Product weight | 330 g |

| ELECTRICAL DATA | |
|-----------------------------|--------------------|
| Operating voltage | 24V |
| Operating voltage type | DC |
| Operating voltage tolerance | +/- 10% |
| Rated operational voltage | 24 VDC |
| Rated operational current | 130 mA |
| Rated inrush current | <500mA |
| Protection class | Protection class 2 |
| Pollution degree | 3 |

| OPTICAL DATA | |
|----------------------|--------------------------------|
| Light source | LED |
| Light colour | Blue Green Red Yellow |
| Optical signal image | EVS Permanent |
| Service life optical | 50,000 h maximum |




For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Completely pre-assembled Signal Towers / ClearSIGN
ClearSIGN BM 24VDC BU/GN/YE/RD

| APPROVAL DATA | |
|-----------------------------|-----|
| Conforms with CE | Yes |
| WEEE | Yes |
| Conforms with RED directive | No |
| Conform with ATEX-directive | No |
| Conforms with CCC | No |
| Conforms with UL | No |
| Conforms with FCC | No |
| Conforms with IC | No |
| EAC certificate available | Yes |
| Conforms with AS-I | No |
| ICAO Certification | No |
| Conforms with GL | No |
| Conforms with RoHS CN | No |
| Conforms with VdS | No |

DRAWING

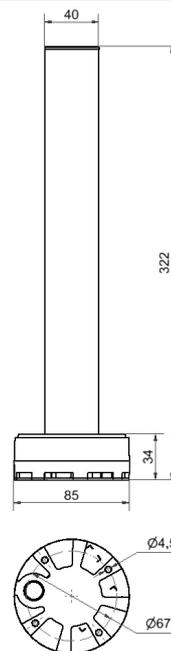

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.