

Completely pre-assembled Signal Towers / ClearSIGN

**ClearSIGN BM 24VDC MC**

Part No.:	656.100.02
Series:	ClearSIGN

**MECHANICAL DATA**

Height	320 mm
Diameter	85 mm
Materials	PC PC/ABS
Dome colour	Clear
Housing colour	White
Protection category	IP66
Connection	IO-LINK M12 plug 4-pole Push-in terminal
cross-sectional area minimum	0,14mm <sup>2</sup> / 26AWG
cross-sectional area maximum	0,50mm <sup>2</sup> / 20AWG
Cable entry	Membrane grommet
Cable entry minimum	d = 1 mm
Cable entry maximum	d = 9 mm
Tension relief	Present (conforms to VDE)
Type of fixing	Base mounting
Working temperature minimum	-20°C
Working temperature maximum	+50°C
Weight with packaging	510 g
Product weight	344 g

**ELECTRICAL DATA**

Operating voltage	24V
Operating voltage type	DC
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	385 mA
Rated inrush current	500 mA
Protection class	Protection class 2
Pollution degree	3
connectivity	IO-Link

**OPTICAL DATA**

Light source	LED
Light colour	MC >1.000.000 colours
Optical signal image	Permanent
Service life optical	50,000 h maximum


**APPROVAL DATA**

For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

Completely pre-assembled Signal Towers / ClearSIGN  
**ClearSIGN BM 24VDC MC**

Conforms with CE	Yes
WEEE	Yes
Conforms with RED directive	No
Conform with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	No
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with AS-I	No
ICAO Certification	No
Conforms with GL	No
Conforms with RoHS CN	No
Conforms with VdS	No

**DRAWING**

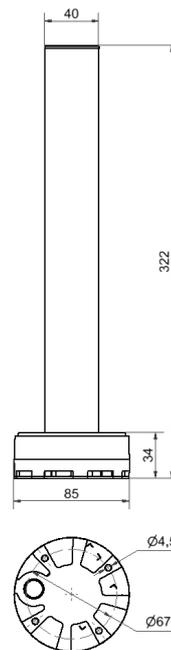

! For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.